

## Instruction Manual



IDX thanks you for choosing the P-V2/P-VS2 and is sure that you will benefit from its unique features. The P-V2/P-VS2 is made to attach IDX's ENDURA System batteries to professional video cameras that do not have a V-Mount style battery lock as standard. Please utilize this instruction manual to best maximize and safely use your P-V2 / P-VS2. If you have any additional questions, please contact the appropriate IDX office or visit our website [www.idx.tv](http://www.idx.tv).

### Features


- [D-Tap] DC output connector for powering on-board camera lights.
- [Digi-View] battery monitoring function. The remaining battery capacity and other data is displayed in the viewfinder of the camera [Refer to Digi-View for further details]
- [Syncron] function allows an on-board camera light to turn on and off in sync with the camera recording mode. [Refer to Syncron for further details]
- The P-V2 / P-VS2 can be attached to most professional video cameras. Fixing can be adjusted to suit different makes via universal fixing positions.

### Specifications


- Maximum output for the D-Tap : 50W
- Dimensions: 82.5(W) x 142(H) x 12(D) mm
- Weight: P-V2 approx.160g, P-VS2 approx.180g
- Included accessories: Installation manual x 1, M3 (8mm) screw x 4

### Parts Description

#### P-V2/P-VS2

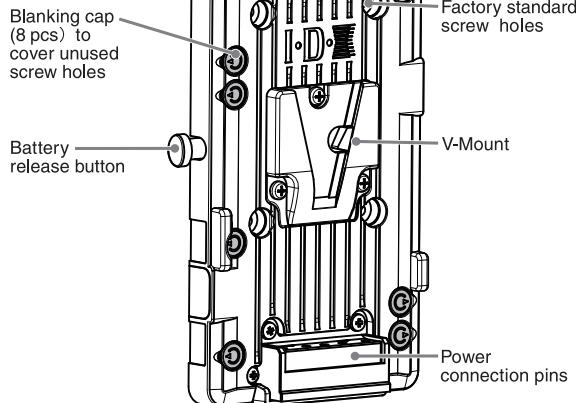


#### P-V2

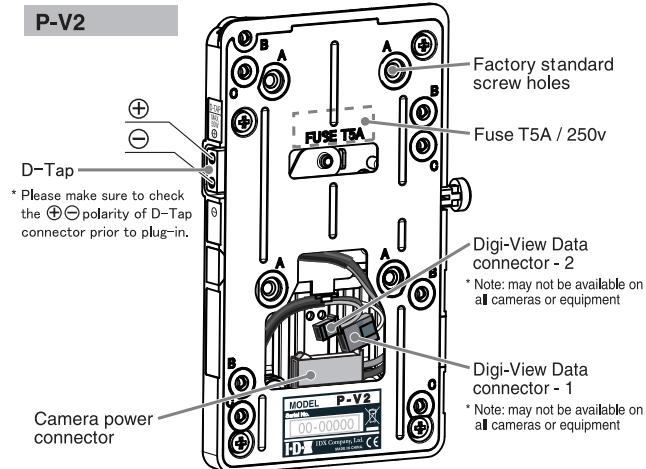


#### At the time of Shipment

The P-V2 / P-VS2 is designed to be universal and attach to all makes of camera. As a factory standard it is shipped with the 4 x screw holes shown as "A" exposed.

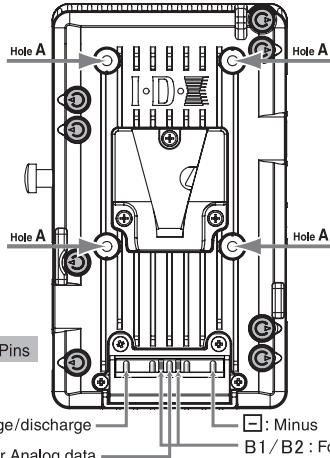


#### P-VS2

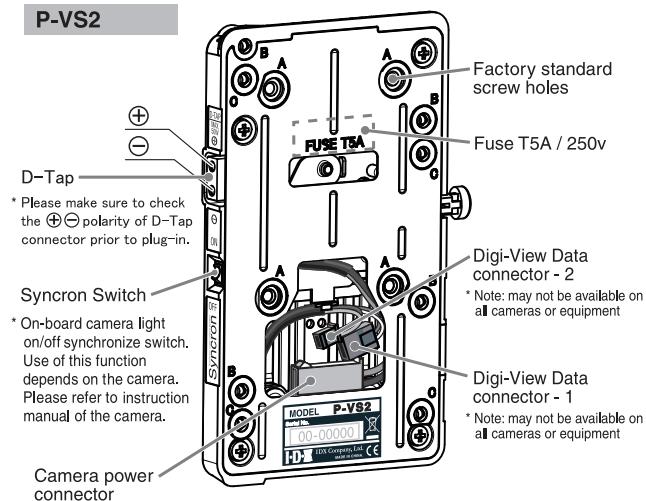

⊕ : For charge/discharge  
⊖ : Minus  
B3: For Analog data  
B1 / B2 : For Digital data

## Fixing positions for Panasonic Cameras


Panasonic video cameras use two different fixing locations to attach the P-V2 / P-VS2 depending on the camera model. Please check which fixing locations are required for your Panasonic camera and use the appropriate location holes.

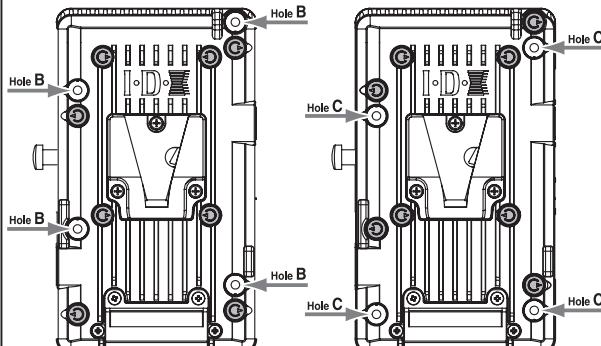


"B" Fixing positions of PV-2 / P-VS2 for Panasonic camera model type AJ-HDX900 / 400A / AJ-HPX2000

"C" Fixing positions of PV-2 / P-VS2 for Panasonic model type AG-HPX500

## How to remove and replace blanking cap

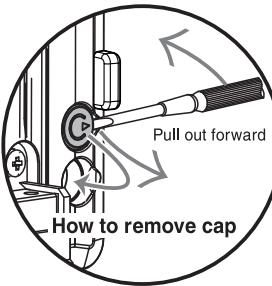

## How to replace cap

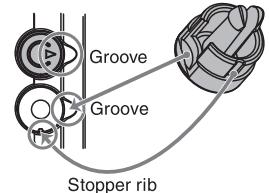


\* Using a small flat head screwdriver remove the blanking cap from its position by inserting the screwdriver under the cap on its ▷ side and pull out.

\* To replace the blanking cap align the ▷ on the cap with the groove on the plate. Push the cap into the plate so that it is secure.

\* Place the removed blanking caps in unused fixing holes in order to prevent possible damage to the plate or attached equipment.


## Fitting/Installation of P-V2/P-VS2 to a Video Camera

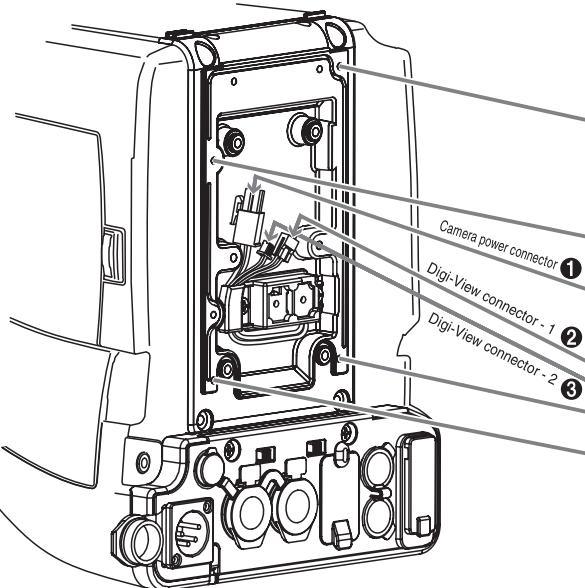

The above diagram shows an example of how to fit a P-V2 / P-VS2 to the Panasonic AG-HPX500 camera

## Connecting the connector cables to a Video Camera

Please connect each connector cable to the video camera as shown below.  
\* Some video cameras may not have connectors ② or ③. In these cases please connect those available connectors.

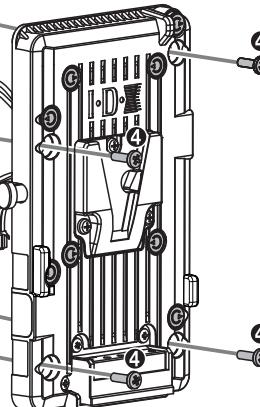

## Fitting the P-V2/P-VS2 plate to the camera

Please attach connectors ①, ②, ③, as required, as shown on the diagram. Please be sure that no cables are trapped between the plate and the camera. Securely fit the plate to the video camera using the 4 x M3 screws. (M3 x 8 mm supplied)

## General Notes and Safety

- Do not attempt to open or modify this unit. All work should be carried out by IDX authorized service personnel only.
- Do not attach P-V2 and P-VS2 plates to any non-compatible video camera or equipment as it may cause defect, damage or other incidents. Please read this Instruction Manual carefully before use. (When connecting cables, please do not pull the cables hard.)
- When connecting a battery or adaptor to a P-V2 and P-VS2 plate, be sure connect firmly. If it is not attached properly, it may result in loss or damage to the unit or even injury to the user.
- Do not expose to, use or place the unit in direct sunlight, extreme dust, water or other hazardous environments.
- A short between the plus (+) and minus (-) charge pins may cause fire, electrical shock or other incidents.
- Stop using immediately in case of abnormal smell, leak, colour change or case deformity during use.
- If you need any inspection or repairs, please contact your IDX dealer or appropriate IDX office.

Design and specifications are subject to change without notice.

Manufacturer : IDX Company,Ltd. 6-28-11 Shukugawara, Tama-ku, Kawasaki-shi, Kanagawa-ken, 214-0021 Japan  
Tel : +81-44-850-8801 Fax : +81-44-850-8838 URL : <https://www.idx.tl> E-mail : idx.japan@idx.tv

Importer for EU : IDX Technology Europe,Ltd. 391 Edinburgh Avenue, Slough Industrial Estate, Slough, SL1 4UF, England  
Tel : +44-1753-547692 Fax : +44-1753-546660 URL : <http://www.idx-europe.co.uk/> E-mail : idx.europe@idx.tv

Importer for USA : IDX System Technology, Inc. 2377 Crenshaw Blvd, Suite 154, Torrance CA 90501 USA  
Tel : +1-310-328-2850 Fax : +1-310-328-8202 URL : <http://www.idxtek.com/> E-mail : idx.usa@idx.tv

