

Thank you for purchasing the C-EB(XLR). C-EB(XLR) is a small conversion adaptor for IDX V-Mount battery. Please read this manual carefully and understand the basic handling methods and precautions before using the product safely. After reading it, be sure to keep it in a place where you can see it at any time.

#### ⚠ WARNING

##### May cause sudden serious injury and death

- Do not use the product beyond the rated or operating conditions of the device.
- Do not carry or store with metal equipment.
- Do not immerse in water.
- Do not attempt to open the outer casing or break apart.
- Do not subject the unit to extreme physical impact or pressure.
- Do not short the contact pins with any metal object.
- Do not attempt to use if damaged.
- Do not place heavy objects or apply pressure.
- Do not damage the cable.
- When connecting the cable, do not pull the cable strongly.

#### ⚠ CAUTION

##### May cause sudden serious injury and death


- The unit should be used under the conditions listed in this manual.
- Do not expose the unit to extremely high temperatures.
- Keep the unit away from fluid or high humidity environment.
- Remove it from the device and stop using it immediately if an odour, leakage, discolouration or deformation is noticed. Do not carry the adaptor while the battery is attached.
- Remove the battery after use.
- Check the input voltage of the device to be used before connecting.

### Features

- Output unregulated voltage from attached battery to XLR plug
- Equipped with belt loop

### Specifications


- Recommended batteries : IDX V-mount battery
- Output plug : XLR 4pin / NC4FXX-B (NEUTRIK)
- Output voltage : DC Unregulated
- Ambient temperature : -4 ~ 113°F (-20 ~ 45°C) (50 ~ 104°F (10 ~ 40°C) recommended)
- Ambient humidity : 20 %~ 90 % RH
- Maximum discharge current : 10 A
- Dimensions : approx. 60 (W) × 106 (H) × 30 (D) mm  
approx. 2.36 (W) × 4.17 (H) × 1.18 (D) inches  
\*Warning. Do not use these dimensions for reference.
- approx. 72 (W) × 106 (H) × 36 (D) mm  
approx. 2.59 (W) × 4.17 (H) × 1.41 (D) inches  
\*Warning. Maximum external dimensions including a belt loop
- Cable length approx. 210mm / 8.26 inches
- Weight : approx. 280g / 0.62 lbs



PIN	Output
1	(-)
2	NC
3	NC
4	(+)

### Parts Description

- ① Adaptor
- ② Battery release button
- ③ V-mount
- ④ Battery connector
- ⑤ Out put plug
- ⑥ Out put cable
- ⑦ Belt loop

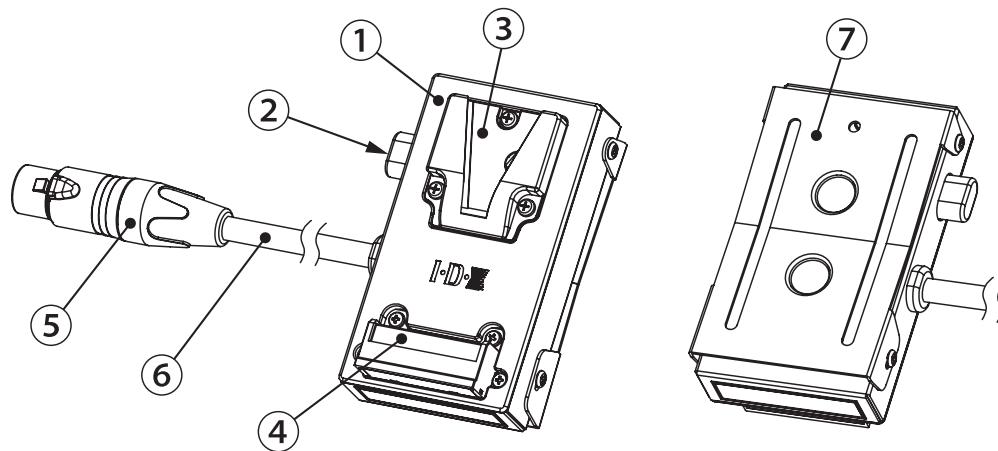

Design and specifications are subject to change without notice.

Manufacturer : IDX Company,Ltd. 6-28-11 Shukugawara, Tama-ku, Kawasaki-shi, Kanagawa-ken, 214-0021 Japan  
Tel : +81-44-850-8801 Fax : +81-44-850-8838 URL : <https://www.idx.tv/> E-mail : idx.japan@idx.tv

Importer for EU : IDX Technology Europe,Ltd. Unit 9, Langley Park, Waterside Drive, Langley, Berkshire SL3 6AD, England  
Tel : +44-1753-547692 Fax : +44-1753-546660 URL : <http://www.idx-europe.co.uk/> E-mail : idx.europe@idx.tv

Importer for USA : IDX System Technology, Inc. 2377 Crenshaw Blvd, Suite 160, Torrance CA 90501 USA  
Tel : +1-310-328-2850 Fax : +1-310-328-8202 URL : <http://www.idxtk.com/> E-mail : idx.usa@idx.tv

202105

APMK210064-1

