

IA-200N



130W AC Adaptor Power Supply

Instruction Manual

Thank you for purchasing the IA-200N. The IA-200N is a compact and rugged AC power adaptor for professional cameras, monitors, and production equipment. Please read this Instruction Manual and keep it for future reference. For questions or service, please contact your local IDX office listed at the bottom of this manual.

⚠ WARNING

May cause sudden serious injury and death

- Do not connect to an AC power source that exceeds the voltage specification stated on the unit.
- Do not short the contact pins with a metal object.
- Avoid metal contact to the connectors.
- Do not expose the unit to direct sunlight; use in well ventilated place.
- Do not immerse in water. Keep the unit away from excessively dry or humid environments.
- Do not attempt to open the outer casing or break it apart.
- In case of fault or service, please contact your IDX dealer or appropriate IDX office.
- Do not drop or apply force to the unit. Do not subject the unit to extreme physical impact or pressure.
- Do not attempt to use if damaged.
- Protect the power cord from any damage. Please do not use a damaged power cord.
- If there is an irregular smell, discoloration, or deformation, immediately turn the unit off and unplug the power cable from the AC mains.



The housing and handles may be hot if using the IA-200N with maximum output or close to maximum output. In such a case, please wait for 15minutes after power-off and carry it.

⚠ CAUTION

May cause injury or damage other equipment

- The unit should be used under the conditions listed in this manual.
- Do not expose the unit to extremely high temperatures beyond the range listed in this manual.
- Use the approved power cord/connector plug which confirms to the proper ratings (voltage, amperage) and safety regulations of each country as applicable.
- It is normal for the top and bottom surface temperatures of the unit to increase during use.
- Do not rest any object on the unit or block the ventilation holes during operation.
- Use the approved power cord / connector / plug which conforms to the proper ratings (voltage, amperage) and safety regulations of each country as applicable.
- This is a class A product and may cause radio interference. In case of radio interference, please take appropriate measures.
- Please use the provided cable and connector and insert the connector firmly.
- The orientation of the unit should be horizontal with the four rubber feet facing down on a flat and stable surface.
- This product is for business use and is not suitable for use in place with children.
- This is a class A product in a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Features

- Universal Auto switching Power Supply – the IA-200N can accept AC power ranging from 100~240VAC.
- IA-200N can be used as a DC power supply for professional cameras, monitors, teleprompters, and other production equipment.

Specifications

- Input voltage : 100V-240V~ 50Hz / 60Hz
- Power consumption : 1.8A-0.8A 170W
- DC Output : 15.1V/8.6A (130W)
- DC Connector : XLR 4P (1pin : - / 4pin : +)
- Operating temperature : 0~40°C
- Operating humidity : 20% ~ 90%RH
- Weight : approx. 1,400g (3.1lbs)
- Dimensions : 125(W) x 75(H) x 235 (D) mm
4.92(W) x 2.95(H) x 9.25(D) inches

Display (Label / Front panel)

INPUT ~ : AC


OUTPUT ≡ : DC

Power SW I : ON / O : OFF

Fuse T5A : Please use the time-lag fuse with 250V, 5A.

*Please use the same specification if change the fuse.

OUTPUT Connector

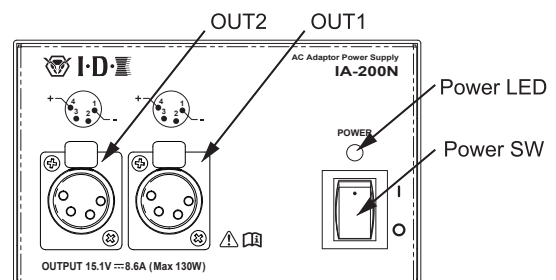

*Maximum output is the total of OUT1 and OUT2. (8.6A, 130W)

How to use

- 1 : Connect AC power cord firmly.
- 2 : Switch the power switch ON.
- 3 : Connect the DC cable to the body and switch ON the equipment.
*Please note that the housing and handles may be hot depending on the load conditions.
- 4 : Please power-off after use.

Design and specifications are subject to change without notice.

Manufacturer : **IDX Company, Ltd.** 6-28-11 Shukugawara, Tama-ku, Kawasaki-shi, Kanagawa-ken, 214-0021 Japan
Tel : +81-44-850-8801 Fax : +81-44-850-8838 URL : <https://www.idx.tv/> E-mail : idx.japan@idx.tv
Importer for EU : **IDX Technology Europe, Ltd.** 391 Edinburgh Avenue, Slough Industrial Estate, Slough, SL1 4UF, England
Tel : +44-1753-547692 Fax : +44-1753-546660 URL : <http://www.idx-europe.co.uk/> E-mail : idx.europe@idx.tv
Importer for USA : **IDX System Technology, Inc.** 2377 Crenshaw Blvd, Suite 154, Torrance CA 90501 USA
Tel : +1-310-328-2850 Fax : +1-310-328-8202 URL : <http://www.idxtek.com/> E-mail : idx.usa@idx.tv

202302
ASMK220008-2

