

LC-XT1

X-Tap Battery Charger



Instruction Manual

Thank you for purchasing the LC-XT1. The LC-XT1 is designed to charge Lithium Ion batteries equipped with X-Tap. Prior to using the charger, IDX recommends to read this Instruction Manual and keep this manual for future reference.

⚠ WARNING

May cause sudden serious injury and death

- Do not connect to an AC power source that exceeds the voltage specification stated on the unit.
- Use only with the compatible batteries listed in this manual.
- Do not short the contact pins with any metal object.
- Do not carry or store with metal equipment.
- Do not immerse in water.
- Do not attempt to open the outer casing or break apart.
- Do not subject the unit to extreme physical impact or pressure, or place any object across the terminals that could cause it to short.
- Do not attempt to use if damaged.
- Protect the power cord from any damage.

⚠ CAUTION

May cause injury or damage other equipment

- The unit should be used under the conditions listed in this manual.
- Do not expose the unit to extremely high temperatures.
- Use the approved power cord / appliance connector / plug conforming to the proper ratings (voltage, ampere) and safety regulations of each country if applicable.
- Keep the unit away from excessively dry or humid environments.
- Stop charging immediately if the charging does not complete within the designated time.
- In case of abnormal smell, leak, color change or case deformity during use, turn the power off and unplug the cable from the socket to avoid possible injury.
- Do not carry the charger while the battery is attached.
- Do not charge the battery while the battery is used with equipments.
- Do not charge the battery while the battery is charged from other charger.

Specifications

- Recommended batteries : IDX Lithium Ion batteries equipped with X-Tap
- Input voltage : AC100V-240V 50 / 60Hz Automatic
- Rated output : DC8.3V/2.3A
- Power consumption : MAX 50VA
- Charging method : Constant current / Constant voltage
- Operating temperature : 0 ~ 40°C / 32 ~ 104°F
- Operating humidity : 20% ~ 90% RH
- Safety Features : Temperature protection / Over-current protection / Short-circuit protection / Reverse polarity protection / Charge protection timer
- Indication : Status LED Indicator (RED / GREEN)
- Dimensions : Charger approx. 105 (W) × 30 (H) × 45 (D) mm
4.14 (W) × 1.18 (H) × 1.77 (D) inches
Charging cable length 0.8m / 31.5 inches
- Weight : Charger body approx. 155g / 0.34 lbs
- Charge time standard :
For the latest charging time information, please visit our website
(<http://idxtek.com/charge-chart>)

Features


- IDX Lithium Ion batteries equipped with X-Tap can be charged.
- Auto safety & protection features

Status LED Indicator

LED indicator states

LED	Indication	Status
Solid Red	●	Charge in progress
Flashing Red	⚡	Battery abnormal temperature/ Charger fault
Solid Green	●	AC is plugged in / Fully Charged
Light Off	○	No power

Operating Instructions / Location and Function of Parts

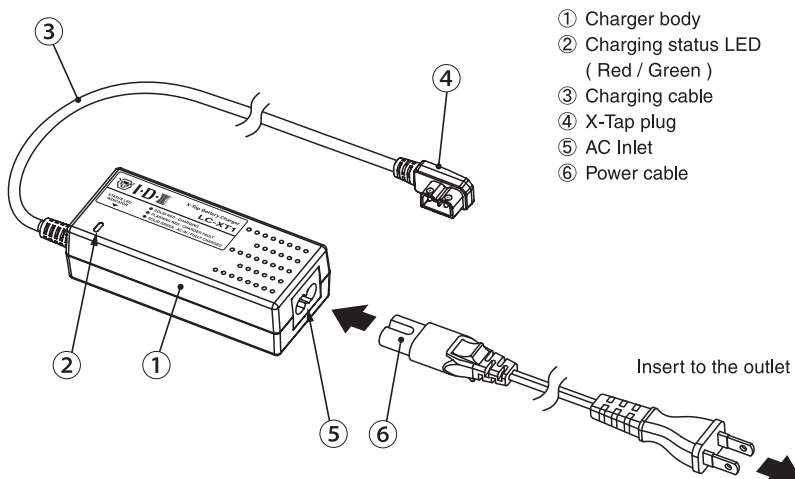

- 1 Charger body
- 2 Charging status LED (Red / Green)
- 3 Charging cable
- 4 X-Tap plug
- 5 AC Inlet
- 6 Power cable

- 1 : Insert a plug into the battery equipped with X-Tap connector, and start charging.
※ Please be sure to check the LED shows RED.
It might be a battery fault/full charge if the LED continuously flashing Green.
- 2 : Charging will complete when the charger detects the battery is fully charged.
※ The charger won't start charging if the charger detects abnormal.
※ The charger won't start charging if the battery's temperature is extremely high/low.
Please be sure to bring a battery back to normal temperature before charging it.

